

## ADK V 600

# MOBILE ACCUMULATOR-DRIVEN SUCTION FRAME



**YOU CAN ALWAYS RELY UPON:**


- German-Swiss quality standards
- High efficiency and reliability
- Worldwide after-sales service

### Flexible accumulator-driven suction frame for mobile use

- Self-contained, accumulator-driven manipulator for handling glass panes and similar plates
- Stepless tilting via hand-operated hydraulic
- Continual manual rotation
- Low own weight
- Two-circuit-vacuum system manufactured to European Standards EN 13155
- Minimal maintenance requirements
- Ergonomically arranged control elements

## Versatile application possibilities

Various modifiable suction cup and connector positioning options made easy via socket pins (without tools).

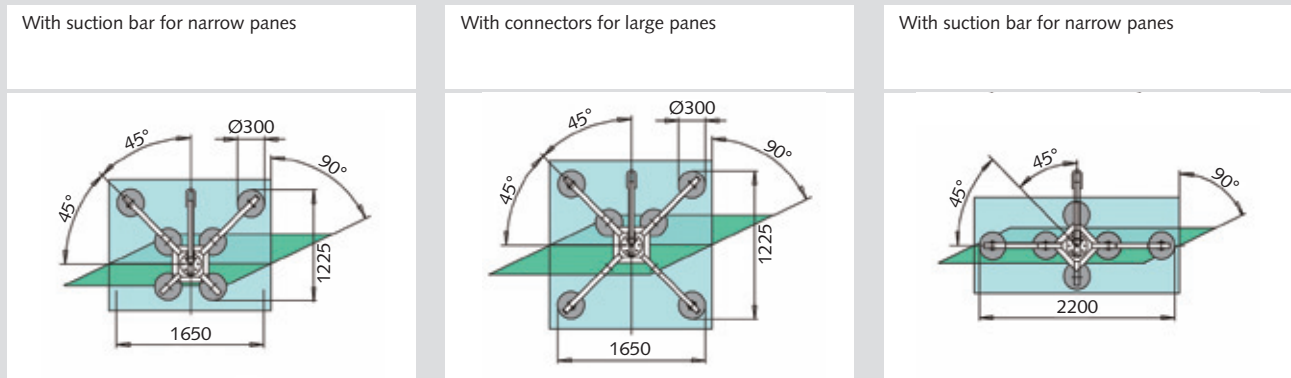

## Practical supplementary equipment



TECHNICAL DATA	ADK V 600
Application	Self-contained in chain or wire rope hoist, in hall or mobile crane
Safe working load	600 kg
Rotation of load	Manually, continual, locking every 45°
Tilting of load	Stepless 0 – 90° by hand-operated hydraulic
Suctions cups	6 pieces, Ø 300 mm
Vacuum generation	Vacuum pump
Own weight	90 kg
Battery	12 V / 7,2 Ah, enough for approx. 150 x sucking
Battery charger	230 V
Dimensions of suction frame	Variable, using combinations of connectors and suction cups
Safety device	Visual indicator



[www.bystronic-glass.com](http://www.bystronic-glass.com)  
[sales@bystronic-glass.com](mailto:sales@bystronic-glass.com)